

Beam Clamps

Load Rated

IPBHZ



The IPBHZ beam clamp is used for horizontal lifting and transfer of steel beams. The base is slotted to allow the clamps to be used from end of beams as well as from the flange. This series of clamps can be used in the vertical and horizontal moving, transfer and stacking of different types of structural designs, such as I-Beams, H-beams, angles, etc, depending on the application desired.

For the Lifting and Transfer of Steel Beams

- Available in capacities of .75 thru 4.5 metric tons.
- Wide variety of jaw openings available: 0 to 50mm.
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (IP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. Serial number is included on the test certificate with maintenance and warranty logbook.
- Maintenance replacement parts are available.
- Manufactured by a ISO 9001 facility.
- All sizes are **RFID EQUIPPED**.


IPBSNZ



The IPBSNZ beam clamp is used for lifting, transfer and stacking. Offset hoisting eye allows for level lifts of I-Beams, also for lifting fabrications and ship sections. This series of clamps can be used in the vertical and horizontal moving, transfer and stacking of different types of structural designs, such as I-Beams, depending on the application desired.




Model IPBHZ

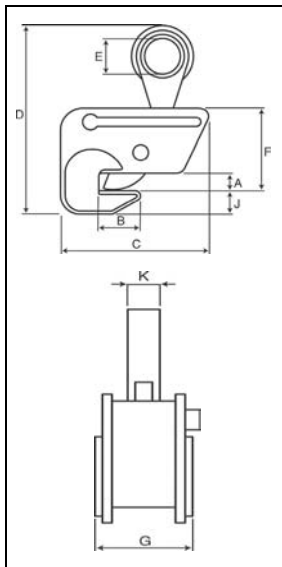

Model	Working Load Limit (t)*	IPBHZ Stock No.	Weight Each (kg.)	Dimensions (mm)									
				Jaw A	B	C	D	E	F	G	H	J	K
IPBHZ	0.75	2705461	3.0	0 - 25	40	148	220	50	130	69	-	33	22
IPBHZ	1.5	2705462	6.0	0 - 25	60	200	255	50	153	73	-	35	28
IPBHZ	3	2705463	10.5	0 - 40	80	227	325	70	188	112	-	38	32
IPBHZ	4.5	2705464	25.0	0 - 40	112	284	413	70	251	116	-	80	40
IPBHZ	12	2705467	42.0	0 - 40	125	466	490	90	317	90	-	90	47

* Design Factor based on EN 13155 and ASME B30.20.

Model IPBSNZ

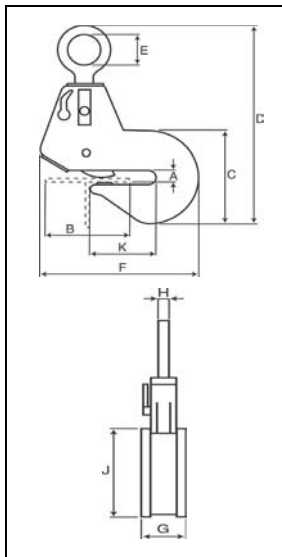

Model	Working Load Limit (t)*	IPBSNZ Stock No.	Weight Each (kg.)	Dimensions (mm)									
				Jaw A	B	C	D	E	F	G	H	J	K
IPBSNZ	1.5	2705925	14.0	0 - 32	100-270	304	480	70	319	47	16	165	148
IPBSNZ	3	2705926	22.0	0 - 40	100-330	352	494	75	408	56	20	207	182
IPBSNZ	4.5	2705927	30.5	0 - 50	100-360	420	630	75	457	56	20	250	188

* Design Factor based on EN 13155 and ASME B30.20.